18QA0187CN

User's 取扱説明書 For Japanese Guide

⚠ 電圧の変換はできません

■この説明書をよくお読みの上、正しくお使いください。
■そのあと大切に保管し、必要なときにお読みください。

©2014 SHIROSHITA INDUSTRIAL CO.,LTD.

1 各部の名称





①コンセント差し込みピン
②差し込み幅調整ボタン
③ブロックB差し込み受け部
④可動式コンセント差し込みピン(O·O2·Aタイプ用)
⑤コンセントシャッター開放ピン(丸·B3タイプ用)
⑥コンセントシャッター開放ピン(平·BFタイプ用)
⑦コンセントシャッター開放ピン(O·O2タイプ用)

2 使用方法

本体をタイプ別に形状変換させ、電源コンセントに差し込んでから、お使いになる電気製品の電源プラグを本体後部に差し込んでお使いください。

BF B3 タイプの形状変換

ブロックAとブロックBを組合わせて使用します。
ブロックBのシャッター開放ピンをコンセント形状にあわせて、ブロックBをブロックAの差し込み受け部にスライドさせて組み合わせてご使用ください。

BFタイプ

コンセント形状

主な使用国
アラビア、アラブ、アルゼンチン、イギリス、イラン、インド、エジプト、サウジアラビア、ジャマイカ、シンガポール、タイ、チリ、香港、マレーシアなど

BF組み立て方



ブロックAとBをスライドさせながら組み立てる

BFタイプコンセントには差し込み調整ボタンを押さずに差し込んでください(※2)

BFコンセント



※3 コンセント形状が四角の場合でも、丸いピン形状で対応可能です

BF·B3タイプ等のコンセントは、安全の為コンセント内にシャッターが有り、アース穴にピンを差し込まないとシャッターが開かないようになっています。

※2 BFタイプのコンセントへ差し込むときは、差し込み幅調整ボタンを押さずに差し込んでください。(一部シャッター構造が異なっており、差し込み幅調整ボタンを押すことにより差し込めないコンセントもあります。)

B3タイプ

コンセント形状

主な使用国
アラブ、イラン、インド、インドネシア、エジプト、クウェート、サウジアラビア、ジャマイカ、チリ、ネパール、香港、マカオ、マレーシアなど

B3組み立て方



ブロックAとBをスライドさせながら組み立てる

差し込みピンを調整しながらコンセントに差し込みます(※1)

B3コンセント



B SE C CB タイプの形状変換

ブロックA単体での使用となります。
差し込み幅調整ボタンで差し込みピンの間隔を調整して差し込んでください。

B·SE·C·CB 組み立て方

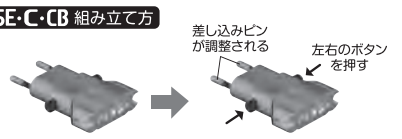

ブロックA

コンセントに差し込み時に左右のボタンを押しながら差し込んでください



※1 コンセント差し込み時には、差し込み調整ピンを押すと差し込みピンの幅が調整されます。

Bタイプ

コンセント形状

主な使用国
シンガポール、中国、ケニア共和国、南アフリカ、クウェート、インド、インドネシア、ネパール、バリ島、モンゴルなど

Bコンセント

Cタイプ

コンセント形状

主な使用国
アルジェリア、アルゼンチン、イタリア、イスラエル、イラン、インド、インドネシア、エジプト、オーストリア、クウェート、サウジアラビア、スイス、スウェーデン、タイ、中国、ドイツ、ニュージーランド、ノルウェー、ハンガリー、フィンランド、フランスなど

Cコンセント

CBタイプ

コンセント形状

主な使用国
ブラジルなど

CBコンセント

SEタイプ

コンセント形状

主な使用国
イスラエル、イラン、インドネシア、エジプト、オーストリア、オランダ、韓国、ギリシャ、クウェート、サウジアラビア、スイス、スウェーデン、スペイン、ドイツ、ニュージーランド、ノルウェー、ハンガリー、フィンランド、フランス、ベルギー、ポルトガル、モロッコなど

SEコンセント



A タイプの形状変換

ブロックB単体での使用となります。可動式コンセント差し込みピン(O·O2·Aタイプ用)をAタイプの形状に回転させお使いください。

Aタイプ

コンセント形状
(共用型)

主な使用国
アメリカ、エジプト、カナダ、カンボジア、グァム、サイパン、サウジアラビア、台湾、フィリピン、ブラジルなど

A組み立て方

左右のピンを広げる

可動式コンセント差し込みピンをAタイプの形状に回転させます

Aコンセント

O O2 タイプの形状変換

ブロックB単体でのご使用となります。可動式コンセント差し込みピン(O·O2·Aタイプ用)をO·O2タイプの形状に回転させ、お使いください。

Oタイプ

コンセント形状 主な使用国

オーストラリア、クック諸島、ニュージーランド、フィジー、パプアニューギニアなど

O組み立て方

左右のピンを広げる

Oタイプの形状に回転させます

Oコンセント



O2タイプ

コンセント形状 主な使用国
(シャッター付)
中国

O2組み立て方

左右のピンを広げる

O2タイプの形状に回転させます

ピンを上方向に回転

O2コンセント



O2タイプのようにアースピンを先に差し込まなくては、シャッターが開かずコンセントが差し込めない場合は、コンセントシャッター開放ピン(O·O2タイプ)を上方向へガチッと止まるところまで回転させてご使用ください。

3 安全にお使いいただくために

·お使いになる人や他の人への危害、財産への損害を未然に防止するため、必ずお守りいただくことを次のように説明しています。
·本文中の表示·記号の意味は次のようになっています。

表示の説明	
⚠警告	この表示は「人が死亡または重傷を負う可能性が想定される内容」を示しています。
⚠注意	この表示は「人が障害を負う可能性が想定される内容や物質的損害の発生が想定される内容」を示しています。

図記号の表示	
	行ってはいけない「禁止」内容を示しています。
	必ず実行していただく「強制」内容を示しています。

⚠警告

禁止
●水などの液体で濡らさないでください。
感電や電子回路のショート、発煙·発火·腐食による故障の原因となります。

禁止
●冷蔵庫·電気ストーブなどに長期間固定した状態では使わないでください。
火災や故障の原因となります。

分解禁止
●分解や改造は行わないでください。
火災や感電、故障の原因となります。

禁止
●定格電圧·電流(250V·6A)以上では使用しないでください。
火災や感電、故障の原因となります。

ぬれ手禁止
●ぬれた手で本器を使用しないでください。
感電の原因となります。

強制
●異常が見られるときはすぐ使用をやめてください。
煙が出る、においがする、水が入ったなどの異常は、火災や感電の原因となります。

⚠注意

·本器は電圧を変換するアダプタではありません。変圧器と併用してお使い下さい。
·海外旅行者向け機器としてのみご使用ください。日本国内は使用できません。

禁止
●ぐらついた台の上や傾いた所など、不安定な場所に置かないでください。
落下して怪我や破損の原因になります。また衝撃などにも十分注意してください。

禁止
●内部に針金などの金属片を入れないよう注意してください。
火災や感電、故障の原因となります。

禁止
●その他、取扱説明書以外の方法では使用しないでください。

禁止
●幼児の手の届く場所には置かないでください。
怪我など事故の原因になります。

禁止
●ご使用後は、必ずコンセントから抜いてください。
火災、故障の原因となります。

禁止
●確実な差し込み等を確認して使用してください。
ぐらつき等のある場合は使用しないでください。

企画·開発元 SHIROSHITA 城下工業株式会社 SHIROSHITA INDUSTRIAL CO.,LTD. 〒386-0015 長野県上田市常入1-1-58
URL http://www.shiroshita.com

User's Guide

For English

Unable to change the voltage.

Please read the manual carefully before using the product.

© 2014 SHIROSHITA INDUSTRIAL CO LTD

1 Product Descriptions



Block A



Block B

①2 silver round pins
②Width adjustment button for 2 silver round pins
③Slide frame for BlockB
④2 silver flat pins for O,O2,A type
⑤Plastic round pin for B3 type
⑥Plastic flat pin for BF type
⑦L shaped flat pin for O2 type

2 Instructions

Change the form of the product as same type as a wall socket, and plug into the wall socket, and then plug your electronics into the receptacle of the product.

B SE C CB How to use B, SE, C, CB type of the socket

Use blockA only. Adjust the 2 silver round pins with a width adjustment button of GoconW2 to plug into the socket.

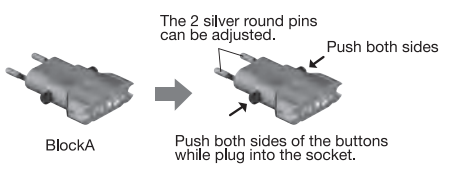



※1.Adjust the width of 2 silver round pins with the buttons to plug into the socket.

B type

B type socket

B tyle can be used in:
Singapore, China, Kenia, South Africa, Kuwait, India, Indonesia, Nepal, Bali, Mongal, etc.



C type

C type socket

C tyle can be used in:
Algeria, Argentina, Italy, Israel, Iran, India, Indonesia, Egypt, Austria, Kuwait, SaudiArabia,Switzerland, Sweden, Thailand, China, Germany, New Caladonia, Norwa y, Hungary, Finland, France, etc.

CB type

CB type socket

CB tyle can be used in:
Brazil, etc.

SE type

SE type socket

SE tyle can be used in:
Israel, Iran, Indonesia, Egypt, Austria, Neatherland, Korea,Greece,Kuwait, Saudi Arabia, Switzerland, Sweden, Spain, Germany, New Caladonia, Norway, Hungary, Finland, France, Belguim, Portgal, Morocco, etc.



BF B3 How to use BF, B3 type of the socket

Use a conbination of blockA and blockB. Choose the plastic round pin or plastic flat pin according to the shape of socket, and slide blockB into the slide frame of blockA.

BF type

BF type socket

BF type can be used in:
Arabia, United Arab Emirates, Arzentina, United Kingdom, Iran, India, Egypt, Saudi Arabia, Jamaica, Singapore, Thailand, Chili, HongKong, Malasia, etc.



Slide blockB into the slide frame of blockA

Do not push width adjustment button for BF type of socket. (※2)



※3 Available to use 2 silver round pins into the square shape holes of BF type socket.

The plastic flat pin and the plastic round pins are for the pins to open the shutter.

※2 Some socket has a rare type of shutter inside the plug holes, and you can not plug into the socket if you push the width adjustment button.

B3 type

B3 type socket

B3 type can be used in:
United Arab Emirates, Iran, India, Indonesia, Egypt, Kuwait, Saudi Arabia, Jamaica, Chili, Nepal, HongKong, Macao, Malasia, etc.



Slide blockB into the slide frame of blockA

Adjust the width of 2 silver round pins with the buttons to plug into the socket. (※1)



A type

A type socket

A type can be used in:
United States, Egypt, Canada, Cambodia, Guam, Saipan, Saudi Arabia, Thai-wan, Philippine, Brazil, etc.

A How to use A type of the socket

Use blockB only. Turn the removable 2 silver flat pins(for O,O2, A type) into the parallel shape for A type outlet.



Open up the plastic pins apart.

Turn the removable 2 silver flat pins into parallel shape to plug into the socket.



O O2 How to use O and O2 type of the socket

Use blockB only. Turn the removable 2 silver flat pins(for O,O2, A type) into the O or O2 shape as shown.

O type

O type socket

O type can be used in:
Austria, Cook Islands, New Zealand, Fiji, Papua New Guinea, etc.



Open up the plastic pins apart.

Turn the removable 2 silver flat pins into V shape to plug into the socket.



O2 type

O2 type socket

(Shutter inside)

O2 type can be used in:
China, etc.

Open up the plastic pins apart.

Turn the removable 2 silver flat pins into V shape.

Half-turn the L shaped flat pin to plug into the socket as shown.



Some socket has a shutter inside the plug holes for safety as O2 type of outlet. Use with the L shaped flat pin to open the shutter if it neccessary.

3 Important safeguards

The following information is in order to prevent harm for user and other people, and the damage to property in beforehand.
The following information is the meaning of a sign and indication

Explanation of indication	
⚠ Warning!	This indication means the "content which are assumed to be a possibility that a person bears the death or a serious wound"
⚠ Attention!	This indication means the "content which are assumed to be a possibility that a person bears a serious wound, and an outbreak of material damage."

Indication of figure sign.	
	This sign indicates "prohibition" contents that must not do.
	This sign indicates "compulsion" contents that must do.

⚠ Warning!

- Prohibition — ● Do not wet with liquid. It will cause trouble of an electric shock, short of an electronic circuit, an emit smoke, ignition, and corrosion.
- Prohibition — ● Do not use it in over 250 Voltage / 6A electric current. It will cause trouble of electric shock, and fire.
- Prohibition — ● Do not use it in condition where fixed to refrigerator/electric heater, etc for a long time. It will cause a fire.
- Prohibition of using it with wet hand. — ● Do not handle with wet hands. It will cause trouble of electric shock.
- Resolution prohibition — ● Do not decompose or remodel. It will cause trouble of electric shock, and fire.
- Compulsion — ● When there is abnormality, stop using it immediately. It will cause trouble of electric shock, and fire when abnormal things happen such as a smoke, smell, and enters water.

⚠ Attention!

Go!con W2 is an adapter to convert the voltage, so use with a transformer if the voltage differs.

This product is for foreign travel only. Unable to use in Japan.

- Prohibition — ● Do not put it on the place where is instability (Such as on top of a shaky table, or the place that declined) When it fells, it will cause trouble of an injury and damage. Also, pay attention to a shock.
- Prohibition — ● Do not put it on the place where infant can reach their hands. It will cause an accident of injury.
- Prohibition — ● Do not put a metal fragment inside (such as a wire). It will cause trouble of electric shock, and fire.
- Prohibition — ● Be sure to pull out the plug from the power socket after using. It will cause a trouble, and fire.
- Prohibition — ● Do not use it in the other methods besides an instruction manual.
- Prohibition — ● Do not use it when the plug is unstable condition. It will cause a trouble, and fire.

■Manufacturer:
SHIROSHITA INDUSTRIAL CO.,LTD.
1-1-58, Tokiiri,Ueda-shi, Nagano 386-0015 Japan URL http://www.shiroshita.com